

DELTA 6000 R

FLEXIBLE PACKAGING SOLUTIONS



MAIN FEATURES


- 1 • Hygienic design
- 2 • Modular construction design
- 3 • Electronic machine with commercial available components
- 4 • High speed long dwell sealing jaws technology

The Delta 6000 R is a new fully modular design flow wrapping machine that offers complete IP65 protection, enabling full wash down capability, even of the sealing elements. This flow wrapping platform incorporates a new higher speed long-dwell sealing system for MAP applications up to 150ppm. Ideal for meat, cheese, pizza and bakery products.

BENEFITS

- 1 • Higher degree of machine cleaning - Easier cleaning process - Possibility to install the machine in harsh environment
- 2 • Possibility to expand the machine option configuration & connect the machine with different feeding system
- 3 • Higher reliability components - Easy maintenance
- 4 • To perform hermetic sealing and MAP applications while managing a wide range of wrapping material characteristics

TECHNICAL DATA

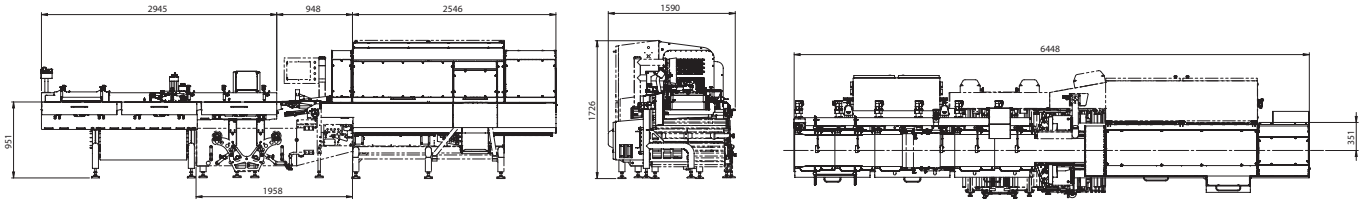

Machine Speed	Up to 150 cycles per minute Production output depends on film sealability and product characteristics
Film Cut-Off	Min 100mm - 4.0" / Max 1200mm - 47" Depending on film and product characteristics
Wrapping Materials	Shrink barrier films, laminated, co-extruded and all sealable films
Film Reel Max Weight	Depending on film reel width, up to 75 kg - 165 lbs
Electronic Platform	Industrial PC Other electronic control platform on request i.e. Allen Bradley, Siemens, Elau-Schneider, B&R
Power Requirement	From 220 to 480 V, 50/60 Hz, 7kVA
Compressed Air	6 bar, 200 l/min
Machine Weight	1400 Kg - 3100 lbs
PRODUCT DIMENSIONS	
length	Up to 650mm - 25.6" standard Up to 1000mm - 39.0" on request
width	150mm - 5.9" on request (jaws 190mm - 7.5") 300mm - 11.8" standard (jaws 345mm - 13.6") 420mm - 16.5" on request (jaws 450mm - 17.7")
height	Up to 110mm - 4.3" standard (centre-axle 180) Up to 150mm - 6.0" on request (centre-axle 225) Up to 60mm - 2.4" on request (centre-axle 140)
FILM REEL DIMENSIONS	
coreø	76.2mm - 3" standard 152.4mm - 6" on request
outerø	350mm - 13.8" standard for reel web width up to 800-900mm 400mm - 15.7" on request for reel web width up to 500-650mm
width	500mm / 650mm - 19.7" / 25.5" standard 800mm / 900mm - 31.5" / 35.5" on request

